
Insulated Panels





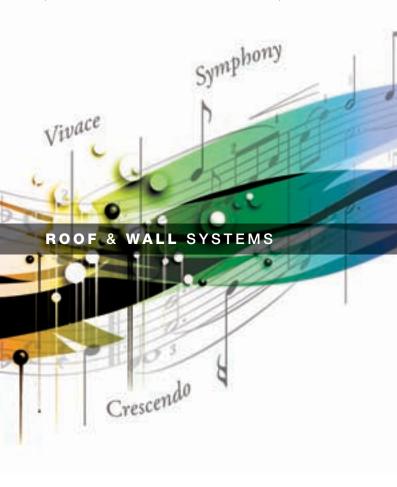

Start with the finish

Kingspan XL Forté™


Kingspan Insulated Panels are proud to present Kingspan XL Forté™, a strong, organic coating system in a range of industry inspired colours, which provides premium protection to the building envelope. This new range features enhanced UV protection, greater corrosion resistance and most importantly is covered for up to 30 years with Kingspan's fully comprehensive Total Coating Guarantee.

Kingspan XL Forté $^{\text{m}}$ is designed in accordance with Kingspan's sustainability visions and objectives, and as such, contains no heavy metals, is phthalate-free and is fully recyclable.

This new and exciting coating system presents specifiers with a collection of shades from subtle pastels to vibrant primary colours. The wide variety of colours provide many design possibilities using either individual or a combination of complimentary colours.

Benefits

- Improved UV resistance for advanced colour fastness
- Leathergrain finish in a range of industry inspired colours
- Excellent corrosion resistance, even on cut edges
- Environmentally friendly: phthalate-free, contains no heavy metals
- 100% recyclable
- Maintenance free for up to 30 years

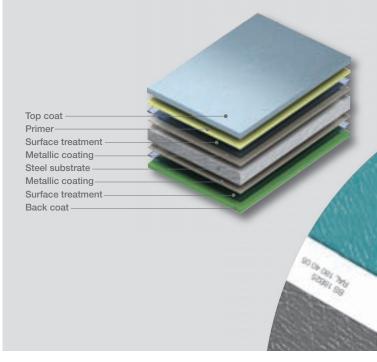




Kingspan XL Forté™ consists of a multi layer organic coating, embossed with a traditional leathergrain finish which will easily match existing building envelopes.



Properties

| Kingspan XL Forté™ | | | | |
|-----------------------------------|------------------------------------------------|--|--|--|
| Properties | Phthalate-free organic coating | | | |
| Application | Roofing, cladding, ancillaries and accessories | | | |
| Description | | | | |
| Thickness | Nominal: 200 microns | | | |
| Gloss (Gardner 60°) | 15 – 45 GU % | | | |
| Appearance | Embossed leathergrain | | | |
| Performance | | | | |
| Scratch resistance (Clemen) | ≥ 3500 g | | | |
| Abrasion resistance (Taber) | ≥ 30 mg | | | |
| Impact resistance | Very good (no loss | | | |
| | of adhesion) | | | |
| Resistance to cracking on bending | ≥ 1.5 T | | | |
| Salt spray testing | 1000 hours | | | |
| Condensation resistance | 1500 hours | | | |
| Temperature resistance | Maximum 75°C | | | |
| UV resistance | Excellent | | | |

Please note that the data in the table above are typical properties and should not be used as a specification. Please contact Kingspan envirocare® Technical Services for further information.

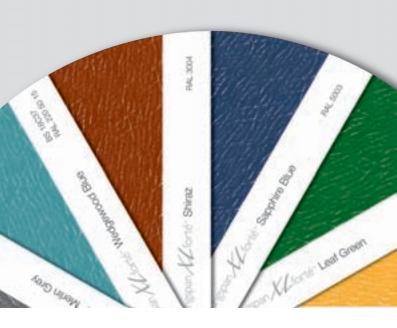

Colour fastness and UV resistance

The improved properties of Kingspan XL Forté[™] provide better gloss retention and weather resistance than most other coatings available on the market. Kingspan XL Forté[™]'s improved UV resistance fully complies with European RUV4 classification (EN 10169/1 and (EN 10169/2).



Standard coating after testing

Kingspan XL Forté™ after testing

Corrosion resistance

Kingspan XL Forté™ uses an innovative substrate of zinc-aluminium alloy coating 265 g/m² (ZA265) which provides maximum resistance to corrosion on scratches and on cut edges.



Kingspan Total Coating Guarantee

Many manufacturers guarantee their products for specific areas of performance, however, few can offer the comprehensive and broad coverage that is available with the Kingspan Total Coating Guarantee.

Benefits of the Kingspan Total Coating Guarantee:

- Guarantees zero maintenance for up to 30 years
- Offers cut edge protection for full life of the guarantee
- Simple fuss free guarantee administration service means no lengthy questionnaires to complete
- Guarantee is available directly to the property owner and can be transferred
- Applicable to all Kingspan insulated panels and ancillaries down to a minimum roof pitch of 1.5°
- · No restrictions applied to the area of surface affected
- Not orientation dependent
- No notice requirement for end of guarantee period

The Kingspan Total Coating Guarantee is your assurance that the coating will not deteriorate in performance.

The Kingspan Total Panel Guarantee is also available which covers the panel and the coating. For further information please contact Kingspan on 01352 716100.

Performance Guarantee Periods

| | Inland Roof | Inland Wall | Coastal Roof | Coastal Wall |
|-----------|----------------|----------------|-----------------|-----------------|
| | À | \$ | | |
| Symphony | 30 Years | 30 Years | 25 Years | 25 Years |
| Crescendo | 20 Years | 25 Years | 15 Years | 20 Years |
| Vivace | 20 Years | 25 Years | 15 Years | 20 Years |

Geographical Scope



Sustainability Guaranteed

Sustainability is viewed by Kingspan as one of its core responsibilities. As part of its sustainability objectives, Kingspan is committed to considering sustainability during the design and manufacture, use, and disposal of Kingspan products.



Manufacture

Kingspan XL Forté™ is manufactured with steel, which is durable and recyclable. The organic coating contains no heavy metals and is phthalate-free.

During use

Kingspan XL Forté™ is guaranteed for up to 30 years and is maintenance free for the duration of the guarantee. It does not pose any health or contamination risk to the user or the environment.

End of Life

The product is fully recyclable at the end of its useful life.



Kingspan Ecosafe Insulated Panels

Kingspan's **ECO**safe insulated panels use an environmentally sustainable **FIRE**safe PIR insulation core and specific panels deliver an 'A+' rating according to the Green Guide to Specification. They contain no CFC's or HCFC's, have a low Global Warming Potential (GWP) and have a commercial value for disposal at end of life subject to transport costs.

End of life

Re-use is always the preferred option for all Kingspan **ECO**safe panels, but if that is not possible these panels are suitable for processing through a conventional shredder plant once they have reached the end of their useful life.

The cost of processing panels through shredder plants is approximately cost neutral with the transport costs from the site being covered by the scrap value of steel.











Full Support

Kingspan **enviro**care® Technical Services offer technical advice and support throughout the design and construction process. From the undertaking of Energy Performance Calculations to the creation of project specific NBS specifications, Kingspan **enviro**care® Technical Services can help to ensure that your building complies with the building regulations.

UK

Tel: 0800 587 0090

Ireland

+353 (0) 42 96 98529



Kingspan's Field Service Engineers offer free contractor training on the installation of new and existing products at our specially designed Kingspan energi centre in Holywell, North Wales and at Kingscourt, Ireland. They also offer a site inspection service throughout the construction stage and can offer advice on mechanical handling solutions.



Metal swatches of Kingspan XL Forté™ can be requested via Kingspan's Marketing Department to assist you in verifying colour and texture of the coating system before specification.

UK

Tel: +44 (0) 1352 717251 Email: info@kingspanpanels.com

Ireland

Tel: +353 (0) 42 9698 540

Email: marketingkc@kingspan.net


For further information, the latest updates and to view our 3D virtual colour selector for Kingspan XL Forté™ go to www.kingspanpanels.com/XLForte



A strong and colourful coating system

Kingspan XL Forté™

The next generation in organic pre-coated steels designed for roof and wall cladding applications in the most demanding environments.

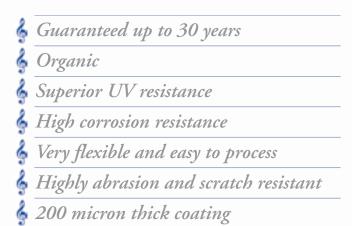



Symphony Collection



White BS 00E55 RAL 9003



Cream BS 10C31 RAL 1015




Grey White RAL 9002




Goosewing Grey BS 10A05 RAL 080 70 05



Gull Grey BS 18B17 RAL 240 80 05



Anthracite RAL 7016




Merlin Grey BS 18B25 RAL 180 40 05



Black BS 00E53 RAL 9005




Willow Green BS 12B17 RAL 100 80 20



Khaki Green BS 12B21 RAL 100 60 20




Mushroom BS 10B19 RAL 080 70 10



Camouflage RAL 110 50 10



Cinnamon BS 08C35 RAL 080 70 30




Olive Green BS 12B27 RAL100 30 20



Quartz Grey BS 10B23 RAL 080 50 20




Bottle Green RAL 6007




Powder Blue RAL 210 80 10



Pastel Blue RAL 240 80 10




Wedgewood Blue BS 18C37 RAL 220 50 15




Denim RAL 5014



Midnight RAL 5008




Deep Blue RAL 260 40 20



Autumn RAL 040 50 20


Crescendo Collection



Russet Red BS 04D44 RAL 3013




Azure Blue BS 18C39 RAL 220 30 25



Shiraz RAL 3004



Sapphire Blue RAL 5003



Copper Beech BS 04C39 RAL 040 40 40



Jade BS 14C37



Van Dyke Brown BS 08B29 RAL 8014




Juniper Green BS 12B29 RAL 160 20 10

For further details visit:

Vivace Collection



Sunflower Yellow BS 10E55




Cornflower Blue BS 18E53




Saffron Yellow BS 08E53



Slate Blue BS 18B29



Leaf Green RAL 6002



Flame Red BS 04E53

The colour samples are only representative of the Kingspan XL Forté™ colours.

British Standard (BS) or RAL reference numbers represent the nearest colours and are not exact matches to Kingspan XL Forté $^{\text{TM}}$.

Please ensure that you request a swatch sample from the Kingspan Marketing Department to view accurate colour and texture prior to specification.



For further information on Kingspan XL Forté™ visit:

www.kingspanpanels.com/XLForte

or call

UK

+44 (0) 1352 717251

Ireland

+353 (0) 42 9698 540

